

# KEFÖ

PREMIJUM PARTNER  
U REGIONU



# KERN®

—————

PROFESSIONAL MEASURING

# Promocija

-7%

13.10 -13.11.

Analytical balances KERN ADB · ADJ



The price leader in analytical balances, with internal or external adjustment - now as version with [Max] 220 g!

### Features

- ADB 200-4: Model with incredibly high resolution. Ideal if extremely precise weighing is required
- KERN ADJ: Automatic internal adjustment in the case of a change in temperature  $\geq 2\text{ °C}$  or timecontrolled every 3 h, guarantees high degree of accuracy and makes the balance independent of its location of use
- KERN ADB: Adjusting program CAL for quick setting of the balance accuracy using an external test weight at an additional price, see *test weights*
- **1** ADJ 600-C3 / ADB 600-C3: Compact, space-saving carat balances with a readout of 0.001 ct and a weighing range of 600 ct. The high level of accuracy saves hard cash wherever you are weighing valuable precious stones
- Level indicator and levelling feet for precise levelling of the scale, fitted as standard, to give the most accurate weighing result

- Large glass draught shield with 3 sliding doors for easy access to the items being weighed standard
- Compact size, practical for small spaces
- Simple and convenient 6-key operation

### Technical data

- Large backlit LCD display, digit height 16 mm
- Dimensions weighing surface, stainless steel,  $\varnothing 90\text{ mm}$
- Overall dimensions (incl. draught shield) W×D×H  
KERN ADB/ADJ: 230×310×330 mm  
KERN ADB-C/ADJ-C: 230×310×210 mm
- Weighing space W×D×H  
KERN ADB/ADJ: 170×160×205 mm  
KERN ADB-C/ADJ-C: 170×160×110 mm
- Permissible ambient temperature 10 °C/30 °C

### Accessories

- **2** Set for density determination of liquids and solids with density  $\leq/\geq 1$ , the density is indicated directly on the display, KERN YDB-03
- **3** Ioniser to neutralise electrostatic charge, KERN YBI-01A
- **4** Gemstones plate, aluminium with practical spout, W×D×H 130×80×30 mm, KERN AEJ-A05
- **5** Weighing table to absorb vibrations and oscillations, which would otherwise distort the weighing result, KERN YPS-03
- Minimum weight of sample, smallest weight to be weighed, depending on the required process accuracy, only in combination with a DAkkS calibration certificate, KERN 969-103
- Equipment qualification: compliant qualification concept which includes the following validation services, Installation Qualification (IQ), Operating Qualification (OQ)

#### STANDARD



#### OPTION





Model	Weighing capacity	Readability	Reproducibility	Linearity	Net weight	Option
						DAkkS Calibr. Certificate
<b>KERN</b>	[Max] g	[d] mg	mg	mg	approx. kg	<b>DAkkS</b> KERN
<b>ADB 100-4</b>	120	0,1	0,2	$\pm 0,4$	4,4	963-101
<b>ADB 200-4</b>	220	0,1	0,2	$\pm 0,4$	4,4	963-101
<b>ADB 600-C3</b>	600 ct	0,001 ct	0,002 ct	$\pm 0,004\text{ ct}$	3,8	963-101
<b>ADJ 100-4</b>	120	0,1	0,2	$\pm 0,4$	5	963-101
<b>ADJ 200-4</b>	220	0,1	0,2	$\pm 0,4$	5	963-101
<b>ADJ 600-C3</b>	600 ct	0,001 ct	0,002 ct	$\pm 0,004\text{ ct}$	4,5	963-101

= Carat balances

- 
**Internal adjusting:**  
 Quick setting up of the balance's accuracy with internal adjusting weight (motordriven)
- 
**Adjusting program CAL:**  
 For quick setting up of the balance's accuracy. External adjusting weight required
- 
**Easy Touch:**  
 Suitable for the connection, data transmission and control through PC or tablet.
- 
**Memory:**  
 Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.
- 
**Alibi memory:**  
 Secure, electronic archiving of weighing results, complying with the 2014/31/EU standard.
- 
**KERN Universal Port (KUP):**  
 allows the connection of external KUP interface adapters, e.g. RS-232, RS-485, SB, Bluetooth, WLAN, Analogue, Ethernet etc. for the exchange of data and control commands, without installation effort
- 
**Data interface RS-232:**  
 To connect the balance to a printer, PC or network
- 
**RS-485 data interface:**  
 To connect the balance to a printer, PC or other peripherals. Suitable for data transfer over large distances. Network in bus topology is possible
- 
**USB data interface:**  
 To connect the balance to a printer, PC or other peripherals
- 
**Bluetooth\* data interface:**  
 To transfer data from the balance to a printer, PC or other peripherals
- 
**WiFi data interface:**  
 To transfer data from the balance to a printer, PC or other peripherals
- 
**Control outputs (optocoupler, digital I/O):**  
 To connect relays, signal lamps, valves, etc.
- 
**Analogue interface:**  
 to connect a suitable peripheral device for analogue processing of the measurements
- 
**Interface for second balance:**  
 For direct connection of a second balance
- 
**Network interface:**  
 For connecting the scale to an Ethernet network
- 
**KERN Communication Protocol (KCP):**  
 It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems
- 
**GLP/ISO log:**  
 The balance displays weight, date and time, independent of a printer connection
- 
**GLP/ISO log:**  
 With weight, date and time. Only with KERN printers.
- 
**Piece counting:**  
 Reference quantities selectable. Display can be switched from piece to weight
- 
**Recipe level A:**  
 The weights of the recipe ingredients can be added together and the total weight of the recipe can be printed out
- 
**Recipe level B:**  
 Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display
- 
**Totalising level A:**  
 The weights of similar items can be added together and the total can be printed out
- 
**Percentage determination:**  
 Determining the deviation in % from the target value (100 %)
- 
**Weighing units:**  
 Can be switched to e.g. nonmetric units. See balance model. Please refer to KERN's website for more details
- 
**Weighing with tolerance range:**  
 (Checkweighing) Upper and lower limiting can be programmed individually, e.g. for sorting and dosing. The process is supported by an audible or visual signal, see the relevant model
- 
**Hold function:**  
 (Animal weighing program) When the weighing conditions are unstable, a stable weight is calculated as an average value
- 
**Protection against dust and water splashes IPxx:**  
 The type of protection is shown in the pictogram.
- 
**Suspended weighing:**  
 Load support with hook on the underside of the balance
- 
**Battery operation:**  
 Ready for battery operation. The battery type is specified for each device
- 
**Rechargeable battery pack:**  
 Rechargeable set
- 
**Universal plug-in power supply:**  
 with universal input and optional input socket adapters for  
 A) EU, CH, GB  
 B) EU, CH, GB, USA  
 C) EU, CH, GB, USA, AUS
- 
**Plug-in power supply:**  
 230V/50Hz in standard version for EU, CH. On request GB, USA or AUS version available
- 
**Integrated power supply unit:**  
 Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, USA or AUS on request
- 
**Weighing principle: Strain gauges**  
 Electrical resistor on an elastic deforming body
- 
**Weighing principle: Tuning fork**  
 A resonating body is electromagnetically excited, causing it to oscillate
- 
**Weighing principle: Electromagnetic force compensation**  
 Coil inside a permanent magnet. For the most accurate weighings
- 
**Weighing principle: Single cell technology:**  
 Advanced version of the force compensation principle with the highest level of precision
- 
**Verification possible:**  
 The time required for verification is specified in the pictogram
- 
**DAkkS calibration possible (DKD):**  
 The time required for DAkkS calibration is shown in days in the pictogram
- 
**Factory calibration (ISO):**  
 The time required for Factory calibration is shown in days in the pictogram
- 
**Package shipment:**  
 The time required for internal shipping preparations is shown in days in the pictogram
- 
**Pallet shipment:**  
 The time required for internal shipping preparations is shown in days in the pictogram

\*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by KERN & SOHN GmbH is under license. Other trademarks and trade names are those of their respective owners.

Moisture analyser KERN DBS

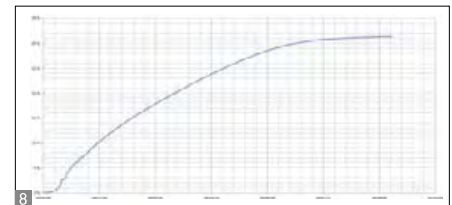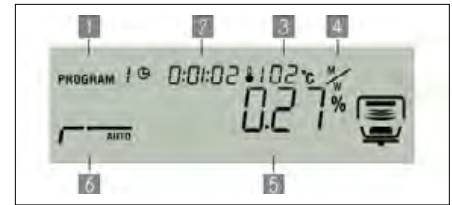

**-7%**  
13.10 -13.11.

Moisture analyser with high-quality single-cell weighing system for outstanding stability, reliability and response speed


### Features

- Tip: Suitable for samples with low moisture content, e.g. plastics
- Backlit Graphic display, digit height 15 mm
- 1 Drying process active
- 2 Previous drying time
- 3 Current temperature
- 4 Unit for displaying the results
- 5 Current moisture content in %
- 6 Active heating profile

- 400 W halogen-quartz glass heater
- Excellent temperature control thanks to halogen technology, suitable for temperature-sensitive samples
- Internal memory for automatic sequence of 10 complete drying processes and 100 drying processes carried out
- The last value measured remains on the display until it is replaced by a new measurement
- Password protection to prevent manipulation of stored settings, data, etc.

- Sample description for up to 99 samples, 2 digits, freely programmable, and is printed in the measuring protocol
- Date and time display as standard
- USB data interface for transferring weighing data to the PC, printer etc., \*only in connection with DBS-A02
- 10 sample plates included
- Protective working cover included with delivery
- Application handbook: On the internet, you will find a practical application handbook containing many examples, field reports, settings and tips for each KERN moisture analyser

### STANDARD



### OPTION

Modell KERN	DBS 60-3
Readability [d]	0,001 g/0,01 %
Weighing capacity [Max]	60 g
Reproducibility weight of sample 2 g*	0,15 %
Reproducibility, weight of sample 10 g*	0,02 %
Display after drying	
Moisture [%] = Moisture content (M) from wet weight (W)	0 - 100 %
Dry content [%] = Dry weight (D) from W	100-0 %
ATRO [%] [(W-D) : D] · 100 %	0-999 %
Moisture content (M)	Absolute value in [g]
Temperature range	50 °C-200 °C in steps up to 1 °C
Drying modes	<input type="checkbox"/> Standard drying <input type="checkbox"/> Drying in levels <input checked="" type="checkbox"/> Gentle drying <input type="checkbox"/> Rapid drying
Switch-off criteria	• Automatic unrestricted switch-off (Selectable loss in weight 0,01%-0,1% in 30 s) • Time controlled switch-off (1 min - 12 h) • Manual switch-off at the press of a button
Recall of measurement/ Log output	Interval can be set from 1 s - 10 min (Only when used with printer or PC)
Overall dimensions WxDxH	204x336x167 mm
Net weight	approx. 4,6 kg
Option DAkkS Calibr. Certificate	Mass: KERN 963-127
Option Factory Calibr. Certificate	Temperature: KERN 964-305

\* application-dependent

### Accessories

- Protective working cover, scope of delivery 5 items, KERN DBS-A03S05
- Sample plates aluminium, Ø 90 mm, unit of 80 pieces, KERN MLB-A01A
- Round fiberglass filter, medium mechanical stability, without organic binder, box of 100 pieces, KERN RH-A02
- 7 Temperature calibration set consists of measuring sensor and display device, KERN DBS-A01.
- 8 Visualisation of the drying process in connection with BalanceConnection, KERN SCD-4.0
- Software BalanceConnection, for flexible recording or transmission of measured values, in particular also to Microsoft® Excel or Access as well as transfer of this data to other Apps and programs, For details see the internet, Scope of supplies: 1 CD, 1 license, KERN SCD-4.0-DL
- USB 2.0 cable, KERN DBS-A04
- Thermal printer, KERN YKB-01N
- Matrix needle printer, to print the weights on normal paper, ideal for long-term archiving, KERN 911-013
- Affordable universal label printer to print out weights on thermal labels, KERN YKE-01

- 
**Internal adjusting:**  
 Quick setting up of the balance's accuracy with internal adjusting weight (motordriven)
- 
**Adjusting program CAL:**  
 For quick setting up of the balance's accuracy. External adjusting weight required
- 
**Easy Touch:**  
 Suitable for the connection, data transmission and control through PC or tablet.
- 
**Memory:**  
 Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.
- 
**Alibi memory:**  
 Secure, electronic archiving of weighing results, complying with the 2014/31/EU standard.
- 
**KERN Universal Port (KUP):**  
 allows the connection of external KUP interface adapters, e.g. RS-232, RS-485, SB, Bluetooth, WLAN, Analogue, Ethernet etc. for the exchange of data and control commands, without installation effort
- 
**Data interface RS-232:**  
 To connect the balance to a printer, PC or network
- 
**RS-485 data interface:**  
 To connect the balance to a printer, PC or other peripherals. Suitable for data transfer over large distances. Network in bus topology is possible
- 
**USB data interface:**  
 To connect the balance to a printer, PC or other peripherals
- 
**Bluetooth\* data interface:**  
 To transfer data from the balance to a printer, PC or other peripherals
- 
**WiFi data interface:**  
 To transfer data from the balance to a printer, PC or other peripherals
- 
**Control outputs (optocoupler, digital I/O):**  
 To connect relays, signal lamps, valves, etc.
- 
**Analogue interface:**  
 to connect a suitable peripheral device for analogue processing of the measurements
- 
**Interface for second balance:**  
 For direct connection of a second balance
- 
**Network interface:**  
 For connecting the scale to an Ethernet network
- 
**KERN Communication Protocol (KCP):**  
 It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems
- 
**GLP/ISO log:**  
 The balance displays weight, date and time, independent of a printer connection
- 
**GLP/ISO log:**  
 With weight, date and time. Only with KERN printers.
- 
**Piece counting:**  
 Reference quantities selectable. Display can be switched from piece to weight
- 
**Recipe level A:**  
 The weights of the recipe ingredients can be added together and the total weight of the recipe can be printed out
- 
**Recipe level B:**  
 Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display
- 
**Totalising level A:**  
 The weights of similar items can be added together and the total can be printed out
- 
**Percentage determination:**  
 Determining the deviation in % from the target value (100 %)
- 
**Weighing units:**  
 Can be switched to e.g. nonmetric units. See balance model. Please refer to KERN's website for more details
- 
**Weighing with tolerance range:**  
 (Checkweighing) Upper and lower limiting can be programmed individually, e.g. for sorting and dosing. The process is supported by an audible or visual signal, see the relevant model
- 
**Hold function:**  
 (Animal weighing program) When the weighing conditions are unstable, a stable weight is calculated as an average value
- 
**Protection against dust and water splashes IPxx:**  
 The type of protection is shown in the pictogram.
- 
**Suspended weighing:**  
 Load support with hook on the underside of the balance
- 
**Battery operation:**  
 Ready for battery operation. The battery type is specified for each device
- 
**Rechargeable battery pack:**  
 Rechargeable set
- 
**Universal plug-in power supply:**  
 with universal input and optional input socket adapters for  
 A) EU, CH, GB  
 B) EU, CH, GB, USA  
 C) EU, CH, GB, USA, AUS
- 
**Plug-in power supply:**  
 230V/50Hz in standard version for EU, CH. On request GB, USA or AUS version available
- 
**Integrated power supply unit:**  
 Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, USA or AUS on request
- 
**Weighing principle: Strain gauges**  
 Electrical resistor on an elastic deforming body
- 
**Weighing principle: Tuning fork**  
 A resonating body is electromagnetically excited, causing it to oscillate
- 
**Weighing principle: Electromagnetic force compensation**  
 Coil inside a permanent magnet. For the most accurate weighings
- 
**Weighing principle: Single cell technology:**  
 Advanced version of the force compensation principle with the highest level of precision
- 
**Verification possible:**  
 The time required for verification is specified in the pictogram
- 
**DAkkS calibration possible (DKD):**  
 The time required for DAkkS calibration is shown in days in the pictogram
- 
**Factory calibration (ISO):**  
 The time required for Factory calibration is shown in days in the pictogram
- 
**Package shipment:**  
 The time required for internal shipping preparations is shown in days in the pictogram
- 
**Pallet shipment:**  
 The time required for internal shipping preparations is shown in days in the pictogram

\*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by KERN & SOHN GmbH is under license. Other trademarks and trade names are those of their respective owners.

IoT-Line Compact laboratory balance KERN PCB



The standard in the laboratory, ideal for a wide range of applications for Industry 4.0

### Features

- Compatible with school-specific software solutions such as, for example, Vernier® or LabQuest®. Thanks to the KERN School Protocol, as part of technical experiments, weighing data can be transferred to a PC, laptop, etc. for evaluation and display using the USB data interface
- Industry 4.0: The integrated KERN Universal Port (KUP) allows the connection of external KUP interface adapters such as RS-232, USB, Bluetooth, WLAN, Analogue, Ethernet etc. The outstanding advantage here is that the KUP interface adapters are simply plugged in, i.e. retrofitting interfaces is conveniently possible without opening the scale housing or complicated installation. The interface adapters enable convenient transmission of weighing data to networks,

- PCs, smartphones, tablets, laptops, printers etc. In addition, control commands and data inputs can also be sent to the scale via the connected devices. Tip: with the KERN KUP-13 extension box, up to three KUP interface adapters can be operated in parallel on the scale.
- KERN Communication Protocol (KCP): The KCP permits searching and remote control of the balance using external control devices or computers. for details see page 8/9
- Standardised, simplified concept of operation
- PRE-TARE function for manual subtraction of a known container weight, useful for checking fill-levels
- With the recipe function you can weigh the different ingredients of a mixture. As a check, you can also call up the total weight of all the ingredients

- Weighing with tolerance range (checkweighing): a visual signal helps with portioning, dispensing or grading
- Freely programmable weighing unit, e.g. display direct in special units such as length of thread g/m, paper weight g/m<sup>2</sup>, or similar
- A special Anti-Shock system between the weighing plate and weighing cell reduces vibrations during the weighing process and in this way ensures rapid, reliable weighing results
- Ring-shaped draught shield standard, only for models with weighing plate size  $\square$ ,  $\varnothing$  82 mm, weighing space  $\varnothing \times H$  90×40 mm
- Protective working cover included with delivery

## IoT-Line Compact laboratory balance KERN PCB




### Technical data

- Backlit LCD display, digit height 21 mm
- Dimensions weighing surface
  - A**  $\varnothing$  82 mm
  - B**  $\varnothing$  105 mm
  - C** WxD 130x130 mm
  - D** WxD 150x170 mm, see larger picture
- Weighing plate material
  - A** plastic, with conductive lacquer
  - B, C, D** stainless steel
- Overall dimensions (without draught shield) WxDxH 163x245x65 mm
- Optional battery operation, 4x1.5 V AA not included in scope of delivery, operating time up to 20 h, AUTO-OFF function to preserve the battery
- Permissible ambient temperature -10 °C/40 °C

### Accessories

- Protective working cover, scope of delivery: 5 items, KERN YBA-A12S05
- Internal rechargeable battery pack, operating time up to 48 h without backlight, charging time approx. 8 h, KERN YKR-01
- External data interface RS-232, Interface cable included, KERN YKUP-01
- External data interface USB, Interface cable included, KERN YKUP-03
- External data interface Ethernet, KERN YKUP-04
- WiFi interface adapter, KERN YKUP-05
- Extension-Box, KERN YKUP-13
- Software BalanceConnection, for flexible recording or transmission of measured values, in particular also to Microsoft® Excel or Access as well as transfer of this data to other Apps and programs, For more details see the internet, Scope of supplies: 1 CD, 1 license, KERN SCD-4.0
- Individual header data: the free software SHM-01 can be used to print 4 header lines on the printout when using printers 911-013, YKN-01, YKB-01N, YKE-01 and YKC-01 (in combination with YKI-02)
- Further details, plenty of further accessories and suitable printers see *Accessories*

#### STANDARD



#### OPTION



Model	Weighing capacity [Max]	Readability	Reproducibility	Linearity	Weighing plate	Option DAkkS Calibr. Certificate DAkkS KERN
	g	[d] g	g	g		
<b>KERN PCB 200-3</b>	200	0,001	0,001	± 0,005	<b>A</b>	963-127
<b>PCB 300-3</b>	360	0,001	0,001	± 0,005	<b>A</b>	963-127
<b>PCB 300-2</b>	300	0,01	0,01	± 0,02	<b>B</b>	963-127
<b>PCB 1000-2</b>	1000	0,01	0,01	± 0,03	<b>C</b>	963-127
<b>PCB 3000-2</b>	3600	0,01	0,01	± 0,05	<b>C</b>	963-127
<b>PCB 2000-1</b>	2000	0,1	0,1	± 0,2	<b>C</b>	963-127
<b>PCB 6000-1</b>	6000	0,1	0,1	± 0,3	<b>D</b>	963-128
<b>PCB 10000-1</b>	10000	0,1	0,1	± 0,3	<b>D</b>	963-128
<b>PCB 6000-0</b>	6000	1	1	± 2	<b>D</b>	963-128

- 
**Internal adjusting:**  
 Quick setting up of the balance's accuracy with internal adjusting weight (motordriven)
- 
**Network interface:**  
 For connecting the scale to an Ethernet network
- 
**Suspended weighing:**  
 Load support with hook on the underside of the balance
- 
**Adjusting program CAL:**  
 For quick setting up of the balance's accuracy. External adjusting weight required
- 
**KERN Communication Protocol (KCP):**  
 It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems
- 
**Battery operation:**  
 Ready for battery operation. The battery type is specified for each device
- 
**Easy Touch:**  
 Suitable for the connection, data transmission and control through PC or tablet.
- 
**Rechargeable battery pack:**  
 Rechargeable set
- 
**Memory:**  
 Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.
- 
**GLP/ISO log:**  
 The balance displays weight, date and time, independent of a printer connection
- 
**Universal plug-in power supply:**  
 with universal input and optional input socket adapters for  
 A) EU, CH, GB  
 B) EU, CH, GB, USA  
 C) EU, CH, GB, USA, AUS
- 
**Alibi memory:**  
 Secure, electronic archiving of weighing results, complying with the 2014/31/EU standard.
- 
**GLP/ISO log:**  
 With weight, date and time. Only with KERN printers.
- 
**Plug-in power supply:**  
 230V/50Hz in standard version for EU, CH. On request GB, USA or AUS version available
- 
**KERN Universal Port (KUP):**  
 allows the connection of external KUP interface adapters, e.g. RS-232, RS-485, SB, Bluetooth, WLAN, Analogue, Ethernet etc. for the exchange of data and control commands, without installation effort
- 
**Piece counting:**  
 Reference quantities selectable. Display can be switched from piece to weight
- 
**Integrated power supply unit:**  
 Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, USA or AUS on request
- 
**Data interface RS-232:**  
 To connect the balance to a printer, PC or network
- 
**Recipe level A:**  
 The weights of the recipe ingredients can be added together and the total weight of the recipe can be printed out
- 
**Weighing principle: Strain gauges**  
 Electrical resistor on an elastic deforming body
- 
**RS-485 data interface:**  
 To connect the balance to a printer, PC or other peripherals. Suitable for data transfer over large distances. Network in bus topology is possible
- 
**Recipe level B:**  
 Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display
- 
**Weighing principle: Tuning fork**  
 A resonating body is electromagnetically excited, causing it to oscillate
- 
**USB data interface:**  
 To connect the balance to a printer, PC or other peripherals
- 
**Totalising level A:**  
 The weights of similar items can be added together and the total can be printed out
- 
**Weighing principle: Electromagnetic force compensation**  
 Coil inside a permanent magnet. For the most accurate weighings
- 
**Bluetooth\* data interface:**  
 To transfer data from the balance to a printer, PC or other peripherals
- 
**Percentage determination:**  
 Determining the deviation in % from the target value (100 %)
- 
**Weighing principle: Single cell technology:**  
 Advanced version of the force compensation principle with the highest level of precision
- 
**WiFi data interface:**  
 To transfer data from the balance to a printer, PC or other peripherals
- 
**Weighing units:**  
 Can be switched to e.g. nonmetric units. See balance model. Please refer to KERN's website for more details
- 
**Verification possible:**  
 The time required for verification is specified in the pictogram
- 
**Control outputs (optocoupler, digital I/O):**  
 To connect relays, signal lamps, valves, etc.
- 
**Weighing with tolerance range:**  
 (Checkweighing) Upper and lower limiting can be programmed individually, e.g. for sorting and dosing. The process is supported by an audible or visual signal, see the relevant model
- 
**DAkkS calibration possible (DKD):**  
 The time required for DAkkS calibration is shown in days in the pictogram
- 
**Analogue interface:**  
 to connect a suitable peripheral device for analogue processing of the measurements
- 
**Hold function:**  
 (Animal weighing program) When the weighing conditions are unstable, a stable weight is calculated as an average value
- 
**Factory calibration (ISO):**  
 The time required for Factory calibration is shown in days in the pictogram
- 
**Interface for second balance:**  
 For direct connection of a second balance
- 
**Protection against dust and water splashes IPxx:**  
 The type of protection is shown in the pictogram.
- 
**Package shipment:**  
 The time required for internal shipping preparations is shown in days in the pictogram
- 
**Pallet shipment:**  
 The time required for internal shipping preparations is shown in days in the pictogram

\*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by KERN & SOHN GmbH is under license. Other trademarks and trade names are those of their respective owners.



## Compound microscope KERN OBS-1

### Note

Please request special conditions for a classroom set



Objectives OBS



OBS 101



OBS 104



OBS 106



### EDUCATIONAL LINE

The school microscope – For the first steps in microscopy and for use in biology lessons

### Scope of application

- Primary school, secondary school, training, hobby use

### Features

- The KERN OBS range is a solid and simple school microscope range, which is easy to use due to its intuitive control elements
- The continuously dimmable 0.5W LED guarantees optimum illumination of the samples and also ensures long service life. Mobile use is also no problem through the use of rechargeable batteries
- The simple 0.65 condenser on the OBS 101 (condenser disc) and the OBS 102 (fixed condenser) ensures the very best concentration of light and illumination of the sample. The OBS 103, 104, 105 and 106 models have a 1.25 Abbe condenser which

is height-adjustable and can therefore be focussed and has an aperture diaphragm, which ensures the very best concentration of light

- To focus the object, all models have a coarse and fine focusing knob on both sides. The mechanical stage enables you to work with the samples and move them rapidly (only for OBS 105, 106)
- A large selection of different eyepieces and objectives is also available
- Please find detailed information in the following model outfit list

### Applications/Samples

- Translucent, thin, high-contrast, less complex samples (e.g. plant tissue, coloured cells/parasites)

### Technical data

- Finite optical system (DIN)
- Triple (OBS 101, 102) or quadplex (OBS 103, 104, 105, 106) nosepiece
- Tube 45° (OBS 101, 102, 103, 105) or 30° (OBS 104, 106) inclined/360° rotatable
- Diopter adjustment: Both-sided (for binocular models)
- Overall dimensions W×D×H 130×300×310 mm
- Net weight approx. 3 kg

#### STANDARD



not  
OBS 101, 102

#### Model

#### Standard configuration




























KERN	Tube	Eyepiece	Objective quality	Objectives	Illumination	Stage
OBS 101	Monocular	WF 10×/ø 18 mm	Achromatic	4×/10×/40×	0,5W LED (transmitted) (battery incl., rechargeable)	fix
OBS 102	Monocular	WF 10×/ø 18 mm	Achromatic		0,5W LED (transmitted) (battery incl., rechargeable)	fix
OBS 103	Monocular	WF 10×/ø 18 mm	Achromatic		0,5W LED (transmitted) (battery incl., rechargeable)	fix
OBS 104	Binocular	WF 10×/ø 18 mm	Achromatic		0,5W LED (transmitted) (battery incl., rechargeable)	fix
OBS 105	Monocular	WF 10×/ø 18 mm	Achromatic		0,5W LED (transmitted) (battery incl., rechargeable)	mechanical
OBS 106	Binocular	WF 10×/ø 18 mm	Achromatic		0,5W LED (transmitted) (battery incl., rechargeable)	mechanical

## Compound microscope KERN OBS-1

Model outfit	Model KERN						Order number	
	OBS 101	OBS 102	OBS 103	OBS 104	OBS 105	OBS 106		
<b>Eyepieces</b> (23,2 mm)	WF 10×/∅ 18 mm	✓	✓	✓	✓✓	✓	✓✓	OBB-A1473
	WF 16×/∅ 13 mm	○	○	○	○○	○	○○	OBB-A1474
	WF 20×/∅ 11 mm	○	○	○	○○	○	○○	OBB-A1475
	WF 10×/∅ 18 mm (with Pointer)	○	○	○	○	○	○	OBB-A1561
<b>Achromatic objectives</b>	4×/0,10 W.D. 18,0 mm	✓	✓	✓	✓	✓	✓	OBB-A1476
	10×/0,25 W.D. 7,0 mm	✓	✓	✓	✓	✓	✓	OBB-A1477
	40×/0,65 (spring-loaded) W.D. 0,53 mm	✓	✓	✓	✓	✓	✓	OBB-A1478
	60×/0,85 (spring-loaded) W.D. 0,1 mm	○	○	○	○	○	○	OBB-A1479
	100×/1,25 (oil) (spring-loaded) W.D. 0,07 mm	○	○	○	○	○	○	OBB-A1480
<b>E-Plan objectives</b>	4×/0,10 W.D. 14,5 mm	○	○	○	○	○	○	OBB-A1562
	10×/0,25 W.D. 5,65 mm	○	○	○	○	○	○	OBB-A1563
	40×/0,65 (spring-loaded) W.D. 0,85 mm	○	○	○	○	○	○	OBB-A1564
	100×/1,25 (oil) (spring-loaded) W.D. 0,07 mm	○	○	○	○	○	○	OBB-A1565
	100×/0,80 (dry) (spring-loaded) W.D. 0,15 mm	○	○	○	○	○	○	OBB-A1442
	Plan 100×/1,0 (water) (spring-loaded) W.D. 0,18 mm	○	○	○	○	○	○	OBB-A1441
<b>Monocular tube</b>	45° inclined/360° rotatable	✓	✓	✓		✓		OBB-A1471
<b>Binocular tube</b>	<ul style="list-style-type: none"> <li>• 30° inclined/360° rotatable</li> <li>• Interpupillary distance 55-75 mm</li> <li>• Diopter adjustment: Both-sided</li> </ul>				✓		✓	OBB-A1472
<b>Fixed stage</b>	<ul style="list-style-type: none"> <li>• Stage size W×D 110×120 mm</li> <li>• Coaxial coarse and fine focusing knobs, scale: 2,5 µm</li> </ul>	✓	✓	✓	✓			
<b>Mechanical stage</b>	<ul style="list-style-type: none"> <li>• Stage size W×D 115×125 mm</li> <li>• Travel 75×18 mm</li> <li>• Coaxial coarse and fine focusing knobs, scale: 2,5 µm</li> </ul>					✓	✓	
<b>Condenser</b>	Simple condenser N.A. 0,65	✓						
	Simple condenser N.A. 0,65 (aperture diaphragm)		✓					
	Abbe N.A. 1,25 (aperture diaphragm)			✓	✓	✓	✓	
<b>Illumination</b>	0,5 W LED illumination system (transmitted) (rechargeable)	✓	✓	✓	✓	✓	✓	
<b>Colour filters for transmitted illumination</b>	Blue			✓	✓	✓	✓	OBB-A1466
	Green			○	○	○	○	OBB-A1467
	Yellow			○	○	○	○	OBB-A1468
	Grey			○	○	○	○	OBB-A1184

✓ = Included with delivery

○ = Option

- 
**360° rotatable microscope head**
- 
**Monocular Microscope**  
 For the inspection with one eye
- 
**Binocular Microscope**  
 For the inspection with both eyes
- 
**Trinocular Microscope**  
 For the inspection with both eyes and the additional option for the connection of a camera
- 
**Abbe Condenser**  
 With high numerical aperture for the concentration and the focusing of light
- 
**Halogen illumination**  
 For pictures bright and rich in contrast
- 
**LED illumination**  
 Cold, energy-saving and especially long-life illumination
- 
**Incident illumination**  
 For non-transparent objects
- 
**Transmitting illumination**  
 For transparent objects
- 
**Fluorescence illumination**  
 For stereomicroscopes
- 
**Fluorescence illumination for compound microscopes**  
 With 100 W mercury lamp and filter
- 
**Fluorescence illumination for compound microscopes**  
 With 3 W LED illumination and filter
- 
**Phase contrast unit**  
 For a higher contrast
- 
**Darkfield condenser/unit**  
 For a higher contrast due to indirect illumination
- 
**Polarising unit**  
 To polarise the light
- 
**Infinity system**  
 Infinity corrected optical system
- 
**Zoom magnification**  
 For stereomicroscopes
- 
**Auto-focus**  
 For automatic control of the focus level
- 
**Parallel optical system**  
 For stereomicroscopes, enables fatigue-proof working
- 
**Integrated scale**  
 In the eyepiece
- 
**SD card**  
 For data storage
- 
**USB 2.0 digital camera**  
 For direct transmitting of the picture to a PC
- 
**USB 3.0 digital camera**  
 For direct transmitting of the picture to a PC
- 
**WiFi data interface:**  
 For transmitting of the picture to a mobile display device
- 
**HDMI digital camera**  
 For direct transmitting of the picture to a display device
- 
**PC software**  
 To transfer the measurements from the device to a PC.
- 
**Automatic temperature compensation**  
 For measurements between 10 °C and 30 °C
- 
**Protection against dust and water splashes IPxx:**  
 The type of protection is shown in the pictogram cf. DIN EN 60529:2000-09, IEC 60529:1989+A1:1999+A2:2013
- 
**Battery operation**  
 Ready for battery operation. The battery type is specified for each device.
- 
**Battery operation rechargeable**  
 Prepared for a rechargeable battery operation
- 
**Plug-in power supply**  
 230V/50Hz in standard version for EU. On request GB, AUS or USA version.
- 
**Integrated power supply unit**  
 Integrated in microscope. 230V/50Hz standard EU. More standards e.g. GB, AUS or USA on request.
- 
**Package shipment**  
 The time required to manufacture the product internally is shown in days in the pictogram.

## ABBREVIATIONS

- C-Mount** Adapter for the connection of a camera to a trinocular microscope
- FPS** Frames per second
- H(S)WF** High (Super) Wide Field (Eyepiece with high eye point for wearers of glasses)
- LWD** Long Working Distance
- N.A.** Numerical Aperture
- SLR camera** Single-Lens Reflex camera
- SWF** Super Wide Field (Field number at least  $\varnothing$  23 mm for 10 $\times$  eyepiece)
- W.D.** Working Distance
- WF** Wide Field (Field number up to  $\varnothing$  22 mm for 10 $\times$  eyepiece)

Digital force gauge SAUTER FL-S



PREMIUM  
★ ★ ★



Universal digital force gauge with graphic-assisted display and integrated load cell

**-7%**  
13.10 - 13.11.

**Features**

- Turnable display with backlight
- Peak-Hold function to capture the peak value or Track function for continuous display of measurement
- Metal housing for durable use in harsh environmental conditions
- Can be mounted on all SAUTER test stands up to 5 kN
- Capacity display: A bar lights up to show how much of the measuring range is still available
- Measuring with tolerance range (limit-setting function): Upper and lower limit adjustable, in pull and push direction. The process is supported by an visual signal
- Internal memory for up to 500 measurement values

- Continuous analogue output: Linear voltage signal in dependence to the load (-2 to +2V)
- USB data interface, as standard
- 1 Standard attachments: as shown
- Selectable measuring units: N, kN, kgf, lbf
- 2 Delivered in a robust carrying case

**Technical data**

- Transfer rate to PC: approx. 25 measured values per second
- Measuring precision: 0,2 % of [Max]
- Overload protection: 120 % of [Max]
- Overall dimensions W×D×H 175×75×30 mm
- Thread: M6
- Rechargeable battery pack integrated, as standard, operating time up to 10 h without backlight, charging time approx. 8 h
- Net weight approx. 0,55 kg

**Accessories**

- Plug-In for data transfer of measuring data from the measuring instrument and transfer to a PC, e.g. in Microsoft Excel®, SAUTER AFI-2.0
- Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST  
Force-displacement only in combination with SAUTER LD, SAUTER AFH LD  
Force-displacement only in combination with SAUTER LB, SAUTER AFH FD
- USB cable, included in delivery, can be ordered separately, USB/PC connection cable (USB-A/USB mini), SAUTER FL-A01
- RS-232 adapter cable, SAUTER FL-A04
- Holders for object fixation and other accessories, please see page 40 onwards or our website

STANDARD



OPTION



Model	Measuring range [Max] N	Readout [d] N	Option <b>DAkks calibration certificate</b>		
			Tensile force DAkks KERN	Compressive force DAkks KERN	Tensile/Compressive force DAkks KERN
SAUTER					
FL 5	5	0,002	-	-	-
FL 10	10	0,005	963-161	963-261	963-361
FL 20	25	0,01	963-161	963-261	963-361
FL 50	50	0,02	963-161	963-261	963-361
FL 100	100	0,05	963-161	963-261	963-361
FL 200	250	0,1	963-161	963-261	963-361
FL 500	500	0,2	963-161	963-261	963-361
FL 1K	1000	0,5	963-162	963-262	963-362

Further calibration options on request



**Adjusting program (CAL):**  
For quick setting of the instrument's accuracy. External adjusting weight required



**Calibration block:**  
Standard for adjusting or correcting the measuring device



**Peak hold function:**  
Capturing a peak value within a measuring process



**Scan mode:**  
Continuous capture and display of measurements



**Push and Pull:**  
The measuring device can capture tension and compression forces



**Length measurement:**  
Captures the geometric dimensions of a test object or the movement during a test process



**Focus function:**  
Increases the measuring accuracy of a device within a defined measuring range



**Internal memory:**  
To save measurements in the device memory



**Data interface RS-232:**  
Bidirectional, for connection of printer and PC



**Profibus:**  
For transmitting data, e.g. between scales, measuring cells, controllers and peripheral devices over long distances. Suitable for safe, fast, fault-tolerant data transmission. Less susceptible to magnetic interference.



**Profinet:**  
Enables efficient data exchange between decentralised peripheral devices (balances, measuring cells, measuring instruments etc.) and a control unit (controller). Especially advantageous when exchanging complex measured values, device, diagnostic and process information. Savings potential through shorter commissioning times and device integration possible



**Data interface USB:**  
To connect the measuring instrument to a printer, PC or other peripheral devices



**Bluetooth\* data interface:**  
To transfer data from the balance/measuring instrument to a printer, PC or other peripherals



**WLAN data interface:**  
To transfer data from the balance/measuring instrument to a printer, PC or other peripherals



**Data interface Infrared:**  
To transfer data from the measuring instrument to a printer, PC or other peripheral devices



**Control outputs (optocoupler, digital I/O):**  
To connect relays, signal lamps, valves, etc.



**Analogue interface:**  
To connect a suitable peripheral device for analogue processing of the measurements



**Analog output:**  
For output of an electrical signal depending on the load (e.g. voltage 0 V - 10 V or current 4 mA - 20 mA)



**Statistics:**  
Using the saved values, the device calculates statistical data, such as average value, standard deviation etc.



**PC Software:**  
To transfer the measurement data from the device to a PC



**Printer:**  
A printer can be connected to the device to print out the measurement data



**Network interface:**  
For connecting the scale/measuring instrument to an Ethernet network



**KERN Communication Protocol (KCP):**  
It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems



**GLP/ISO record keeping:**  
Of measurement data with date, time and serial number. Only with SAUTER printers



**Measuring units:**  
Weighing units can be switched to e.g. non-metric. Please refer to website for more details



**Measuring with tolerance range (limit-setting function):**  
Upper and lower limiting can be programmed individually. The process is supported by an audible or visual signal, see the relevant model



**Protection against dust and water splashes IPxx:**  
The type of protection is shown in the pictogram cf. DIN EN 60529:2000-09, IEC 60529:1989+A1:1999+A2:2013



**ZERO:**  
Resets the display to "0"



**Battery operation:**  
Ready for battery operation. The battery type is specified for each device



**Rechargeable battery pack:**  
Rechargeable set



**Plug-in power supply:**  
230V/50Hz in standard version for EU. On request GB, AUS or USA version available



**Integrated power supply unit:**  
Integrated, 230V/50Hz in EU. More standards e.g. GB, AUS or USA on request



**Motorised drive:**  
The mechanical movement is carried out by an electric motor



**Motorised drive:**  
The mechanical movement is carried out by a synchronous motor (stepper)



**Fast-Move:**  
The total length of travel can be covered by a single lever movement



**Verification possible:**  
Models with type approval for construction of verifiable systems



**DAkKS calibration possible:**  
The time required for DAkKS calibration is shown in days in the pictogram



**Factory calibration:**  
The time required for factory calibration is specified in the pictogram



**Package shipment:**  
The time required for internal shipping preparations is shown in days in the pictogram



**Pallet shipment:**  
The time required for internal shipping preparations is shown in days in the pictogram

\*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by KERN & SOHN GmbH is under license. Other trademarks and trade names are those of their respective owners.